

Ficha técnica :

260 TJ-XP




Capacities		Métrico
Working height	h21	25.89 m
Platform height	h7	23.89 m
Max. outreach	r1	19.70 m
Pendular arm rotation (bottom)		+63 °
Platform capacity	Q	400 kg
Turret rotation		360 °
Platform rotation (right / left)		90 ° / 90 °
Number of people (inside / outside)		3 / 3
Weight and dimensions		
Platform weight*		16480 kg
Platform dimensions (length x width)	lp / ep	2.30 m x 0.90 m
Overall width	b1	2.48 m
Overall length	l1	10.84 m
Overall height	h17	2.80 m
Overall length (stowed)	l9	7.88 m
Overall height (stowed)	h18	2.80 m
Floor height (access)	h20	0.48 m
Counterweight offset (turret at 90°)	a7	1.42 m
Internal turning radius (over tyres)	b13	1.75 m
Ground clearance	m4	0.41 m
Ground clearance at centre of wheelbase	m2	0.41 m
Wheelbase	y	2.71 mm
Performances		
Drive speed - stowed		4.50 km/h
Drive speed - raised		0.80 km/h
Gradeability		35 %
Permissible leveling		4 °
Wheels		
Tyres type		Solid Tyres Cured-On
Drive wheels (front / rear)		2 / 2
Steering wheels (front / rear)		2 / 2
Braking wheels (front / rear)		2 / 2
Engine/Battery		
Engine brand / model		Kubota - V2403-M
Engine nom		Stage IIIA
I.C. Engine power rating / Power (kW)		46 Hp / 34.10 kW
Miscellaneous		
Ground Pressure		21.30 daN/cm²
Hydraulic Pressure		250 bar
Hydraulic tank capacity		94 l
Fuel tank		72 l
Noise to environment (LwA)		< 106 dB(A)
Vibration on hands/arms		< 0 m/s²
Daily consumption **		10.50 l
Standards compliance		
This machine is in compliance with:		European directives: 2006/42/EC- Machinery (revised EN280:2013) - 2004/108/EC (EMC) - 2006/95/EC (Low voltage)

** According to "REDUCE cycle"


Diagramas de carga

Load Chart metric

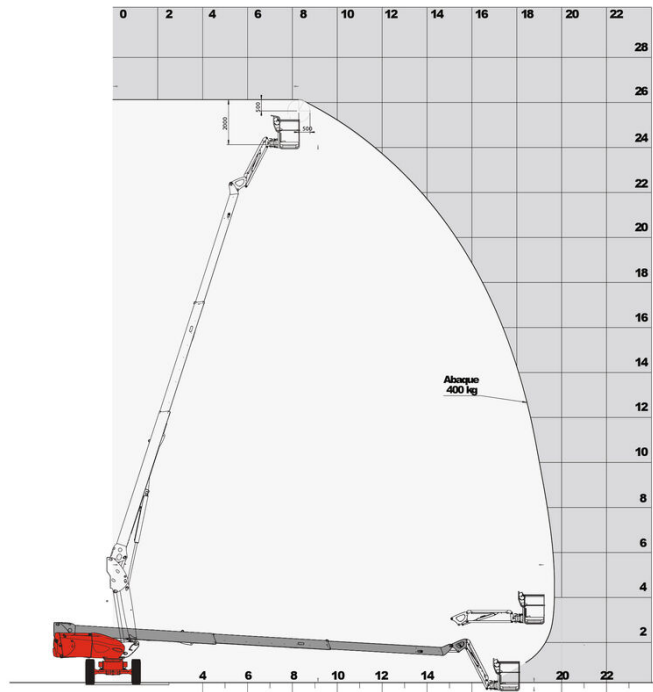

260 TJ-XP - Diagrama dimensional

 260 TJ-XP  260 TJ-XP

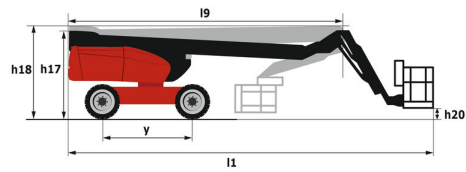

Equipamiento

Estándar

230V Predisposition
 4 simultaneous movements
 4 wheel drive
 4 wheel steer with crab mode
 Audible alarm and illuminated indicator lamp (leveling, overload, lowering)
 Backup electrical pump
 Continuous turret rotation
 Differential locking on rear axle
 Easy Manager
 Electronic platform compensation
 Emergency stop button in platform and on frame
 Engine mounted on sliding platform
 Fuel gauge with low level indicator
 Hour meter
 Integrated diagnostic assistance
 Large basket with three entries
 Leveling unlocking
 Operator presence pedal
 Oscillating front axle
 Rear axle with limited slip differential
 Remote control for transport
 Turret orientation information

Opcional

110 or 230V plug with differential circuit breaker
 Access control keypad for easy link
 Additional storage boxes
 Air predisposition
 Basket 1,800 mm
 Battery cut-off
 Beep on every movement
 Beep upon travel
 Biodegradable oil
 Catalytic cleaner
 Extreme cold oil
 Key lock on fuel tank
 Onboard generator (3,5 or 5 kW)
 Panel support kit
 SMS : Safe Man System
 Safety harness
 Spark arrester
 Tube support kit
 Working light



Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



Esta publicación describe las versiones y posibilidades de configuración de los productos Manitou que puedan diferir en equipamiento. Los equipamientos presentados en este folleto pueden ser de serie, opcionales o no estar disponibles en algunas versiones. Manitou se reserva el derecho, en cualquier momento y sin previo aviso, de modificar las especificaciones descritas y representadas. Las especificaciones aportadas no comprometen al fabricante. Para más información, póngase en contacto con su concesionario Manitou. Documento no contractual. Presentación de los productos no contractual. Lista de especificaciones no exhaustiva. Los logos y la identidad visual de la empresa son propiedad de Manitou y no pueden ser utilizados sin autorización. Todos los derechos reservados. Las fotos y los esquemas contenidos en este folleto se ofrecen para consulta y a título indicativo solamente.

MANITOU BF SA - Sociedad anónima con Consejo de Administración - Capital social : 39 668 399 euros - 857 802 508 RCS Nantes