


Ficha técnica :

MHT-X 790




Capacities		Métrico
Max. capacity		9000 kg
Load centre of gravity	c	600 mm
Max. lifting height		6.84 m
Max. outreach	r1	3.72 m
Weight and dimensions		
Unladen weight (with forks)		13160 kg
Ground clearance	m4	0.40 m
Wheelbase	y	2.87 m
Length to face of forks	l2	5.27 m
Overall width	b1	2.47 m
Overall height	h17	2.47 m
Overall cab width	b4	0.93 m
Tilt-down angle	a5	125 °
Tilt-up angle	a4	12 °
External turning radius (over tyres)	Wa1	4.88 m
Outer turning radius (with forks)	b15	5.59 m
Forks length / width / section	l / e / s	1200 mm x 200 mm / 60 mm
Wheels		
Standard tyres		Aeolus - TLAG P23 - 445/65 R22,5
Number of front wheels / rear wheels		2 / 2
Steering wheels (front / rear)		2 / 2
Drive wheels (front / rear)		2 / 2
Steering mode		2 wheel steer, 4 wheel steer, Crab mode
Engine		
Engine brand		John Deere
Engine norm		Stage IIIA
Engine model		4045PWX
Number of cylinders / Capacity of cylinders		4 - 4500 cm³
I.C. Engine power rating / Power (kW)		137 Hp / 102 kW
Max. torque / Engine rotation		534 Nm@1500 rpm
Engine cooling system		Water
Battery / Batteries capacity		12 V / 180 Ah
Drawbar pull (Laden)		10905 daN
Transmission		
Transmission type		Hydrostatic
Number of gears (forward / reverse)		2 / 2
Max. travel speed		30 km/h
Parking brake		Automatic Negative Hand-brake
Service brake		Hydraulic
Hydraulics		
Hydraulic pump type		Load sensing pump
Hydraulic flow - Pressure		180 l/min - 270 bar
Tank capacities		
Engine oil		13 l
Hydraulic oil		151 l
Fuel tank		150 l
Noise and vibration		
Noise at driving position (LpA)		79.70 dB(A)
Noise to environment (LwA)		103 dB(A)
Vibration on hands/arms		< 2.50 m/s²
Miscellaneous		
Safety / Safety cab homologation		Standard EN 15000 - ROPS - FOPS cab (level 2)
Controls		JSM

MHT-X 790 - Diagrama dimensional

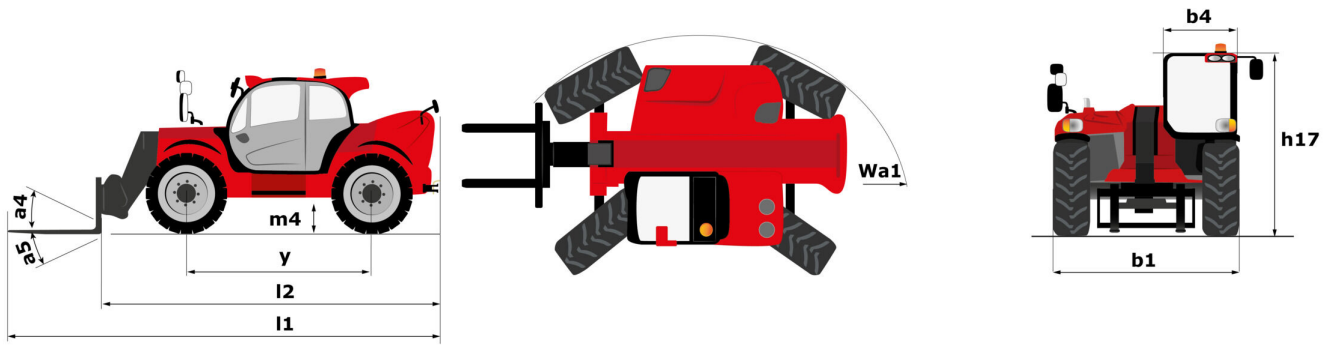

MHT-X 790 - Diagramas de carga

Machine on tyres with forks LC 600 mm Metric




ANNEXE B


Machine on tyres with jib Metric



MHT-X 790

Machine on tyres with winch Metric

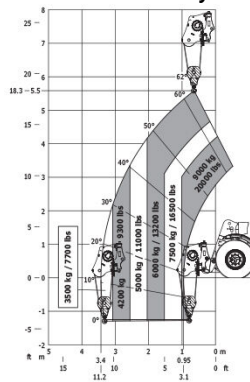

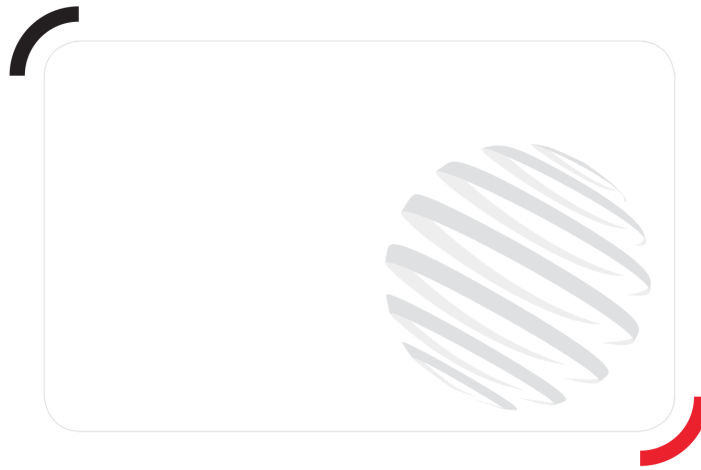

Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



Esta publicación describe las versiones y posibilidades de configuración de los productos Manitou que puedan diferir en equipamiento. Los equipamientos presentados en este folleto pueden ser de serie, opcionales o no estar disponibles en algunas versiones. Manitou se reserva el derecho, en cualquier momento y sin previo aviso, de modificar las especificaciones descritas y representadas. Las especificaciones aportadas no comprometen al fabricante. Para más información, póngase en contacto con su concesionario Manitou. Documento no contractual. Presentación de los productos no contractual. Lista de especificaciones no exhaustiva. Los logos y la identidad visual de la empresa son propiedad de Manitou y no pueden ser utilizados sin autorización. Todos los derechos reservados. Las fotos y los esquemas contenidos en este folleto se ofrecen para consulta y a título indicativo solamente.

MANITOU BF SA - Sociedad anónima con Consejo de Administración - Capital social : 39 668 399 euros - 857 802 508 RCS Nantes